


# AS M.C

## Multiplate

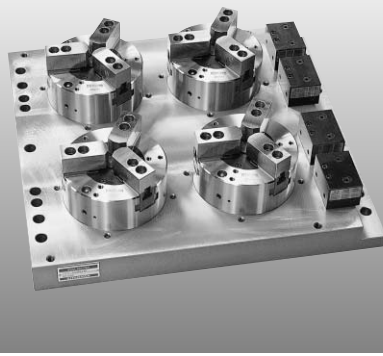


Standard multiple plates are arranged to 2 chuck fixture/4 chuck fixture/6 chuck fixture in series.


- Lock valve unit (option) can be mounted.
- Three jaws (AS type) and two jaws (AT type) can be combined freely.

### MODEL NUMBER EXPLANATION

#### AS06M4C

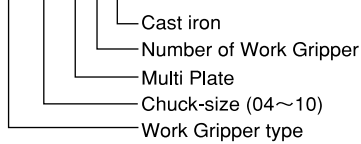

### Dimensional drawing

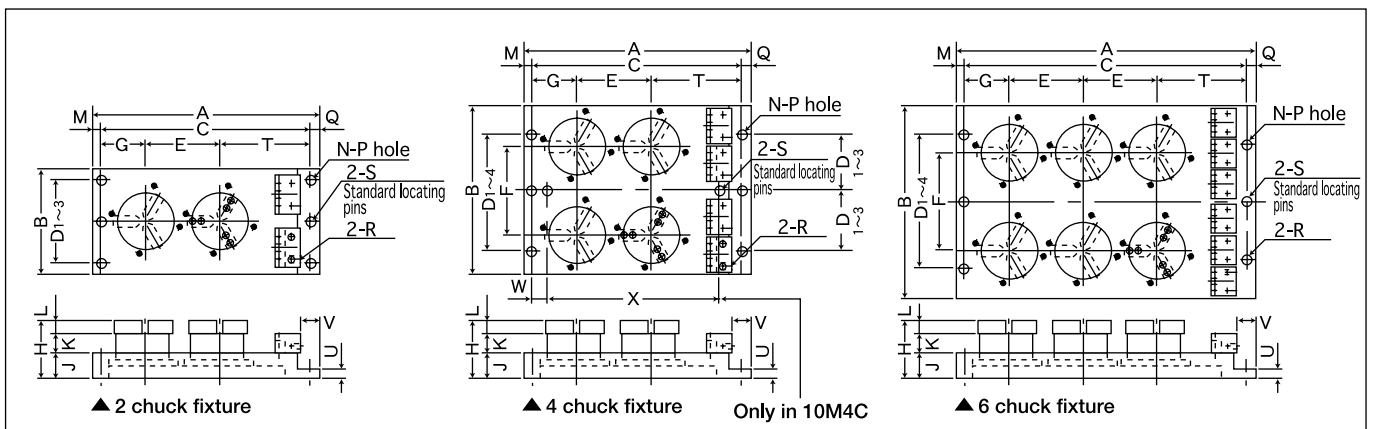

### Dimensional table

TYPE	spec	Matching Work Gripper	A	B	C	D1~4			E	F	G	H	J	
AS04M2C	2 chuck fixture	AS04	450	205	410	1 · 100		2 · 160	155	—	100	143	55	
AS06M2C	2 chuck fixture	AS06	560	270	520	1 · 100	2 · 160	3 · 200	210	—	124	157	55	
AS08M2C	2 chuck fixture	AS08	655	315	615	160	200	250	255	—	150	174	55	
AS10M2C	2 chuck fixture	AS10	765	375	725	160	200	250	310	—	175	182	60	
AS04M4C	4 chuck fixture	AS04	450	380	410	1 · 160	2 · 200	3 · 250	4 · 320	155	180	100	143	55
AS06M4C	4 chuck fixture	AS06	560	515	520	200	250	320	400	210	245	124	157	55
AS08M4C	4 chuck fixture	AS08	655	600	615	200	250	400	500	255	285	150	174	55
AS10M4C	4 chuck fixture	AS10	765	705	725	1 · 160	2 · 200	3 · 250	310	335	175	182	60	
AS04M6C	6 chuck fixture	AS04	660	380	620	1 · 160	2 · 200	3 · 250	4 · 320	155	180	155	143	55
AS06M6C	6 chuck fixture	AS06	770	555	730	200	250	320	400	210	245	124	157	55

TYPE	K	L	M	N	P	Q	R	S	T	U	V	W	X	Weight (kg)
AS04M2C	61	27	20	8	Φ18	20	PT1/4	Φ18	155	25	38.5	—	—	17
AS06M2C	66	36	20	12	Φ18	20	PT1/4	Φ18	186	25	38.5	—	—	26
AS08M2C	77	42	20	12	Φ18	20	PT1/4	Φ18	210	25	38.5	—	—	32
AS10M2C	76	46	20	12	Φ18	20	PT1/4	Φ18	240	25	43.5	—	—	49
AS04M4C	61	27	20	16	Φ18	20	PT1/4	Φ18	155	25	38.5	—	—	31
AS06M4C	66	36	20	16	Φ18	20	PT1/4	Φ18	186	25	38.5	—	—	47
AS08M4C	77	42	20	16	Φ18	20	PT1/4	Φ18	210	25	38.5	—	—	59
AS10M4C	76	46	20	14	Φ18	20	PT1/4	Φ18	240	25	43.5	40	645	87
AS04M6C	61	27	20	16	Φ18	20	PT1/4	Φ18	155	25	38.5	—	—	42
AS06M6C	66	36	20	16	Φ18	20	PT1/4	Φ18	186	25	38.5	—	—	68