



Point


Two pairs of two jaws self center independent of each other. The HW series is suitable for square bar and other nonuniform shaped work pieces.

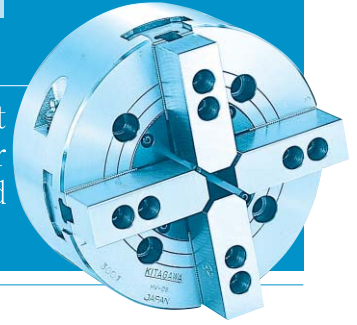

Dimensional Drawings

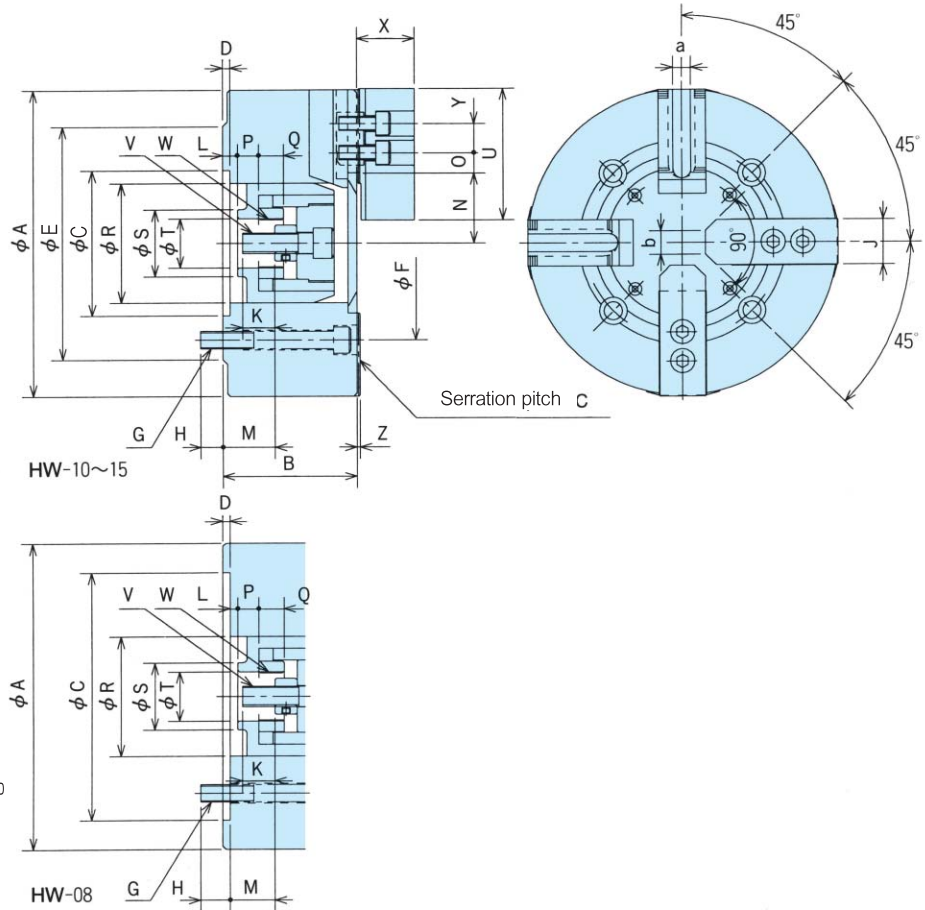

Gripping Characteristic Graphs HW

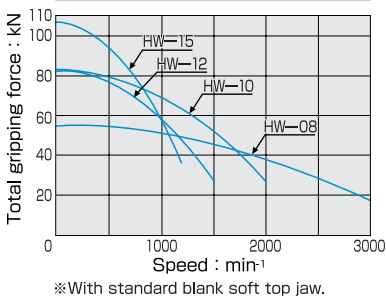

Dimensions Model	A	B	C (H6)	D	E	F	G	H	J	K	L max, min	L max, min	M max, min	N max, min	N max, min	O max, min	P	Q	R	S	T	U	V	W	X	Y	Z	a	b	c		
	HW-08	210	91	170	5	-	1334	4-M12	20	31	29	10.5	-6.5	39	22	51.3	44.7	2425	925	17.5	17	82	46	34	90	M14×2.0	M34×1.5	39	20	2	12	16
HW-10	270	110	120	5.5	200	170	4-M16	24	40	31	18	-4	49	27	64	56	28	13	20	20	103	58	42	110	M16×2.0	M42×1.5	45	30	5	16	-	3.0
HW-12	304	110	120	5.5	200	170	4-M16	24	40	31	18	-4	49	27	64	56	49	13	20	20	103	58	42	110	M16×2.0	M42×1.5	45	30	5	16	-	3.0
HW-15	381	135	195	7.5	285	235	4-M20	30	50	55	26	1	59.5	34.5	78	69.5	66.5	12.5	18.5	24	130	78	55	129	M20×2.5	M55×2.0	53	38	5	18	-	3.0

Specifications Model	Jaw Stroke (diameter) mm	Plunger Stroke mm	Gripping range mm		Max. Draw bar Pull Force kN (kgf)	Max. Gripping Force kN (kgf)	Max. Speed min⁻¹ (r.p.m)	Net Weight with soft top jaws kg	Moment of inertia kg·m²	Matching Cylinder	Max. pressure MPa(kgf/cm²)	Matching Soft top jaw
			Max.	Min.								
HW-08	13.2	17	210	26	16.5 (1683)	56 (5710)	3000	23	0.153	YW1220R	1.71 (17.4)	SB08B1Q
HW-10	16	22	270	54	23 (2345)	84 (8565)	2000	50	0.500	YW1225R	2.29 (23.4)	SB10A2Q
HW-12	16	22	304	54	23 (2345)	84 (8565)	1500	58	0.700	YW1225R	2.29 (23.4)	SB10A2Q
HW-15	17	25	381	63	28 (2855)	108 (11013)	1200	118	2.250	YW1225R	2.73 (27.8)	SB15A2Q

Note) The movement order of jaw cannot be assigned in combination with YW cylinder. (Contact us when assignment is required.)