




BP08

SQUARE TOOLING COLUMN

- Material / Finish:
Material: Cast Iron FC300 (JIS) / GG30 (DIN)
Heat treated (Normalized)
Alignment bushing: SUJ2(JIS) / 100Cr6(DIN), heat treated
Threaded Insert: S45C(JIS) / CK45(DIN), heat treated
MTP hole spacing: 50 ± 0.02
- Application: Horizontal Machining Center.
- Features: Alignment bushing & thread insert at every hole location, easily adapts to standardized jig components.
- Eye bolt & top cover included.

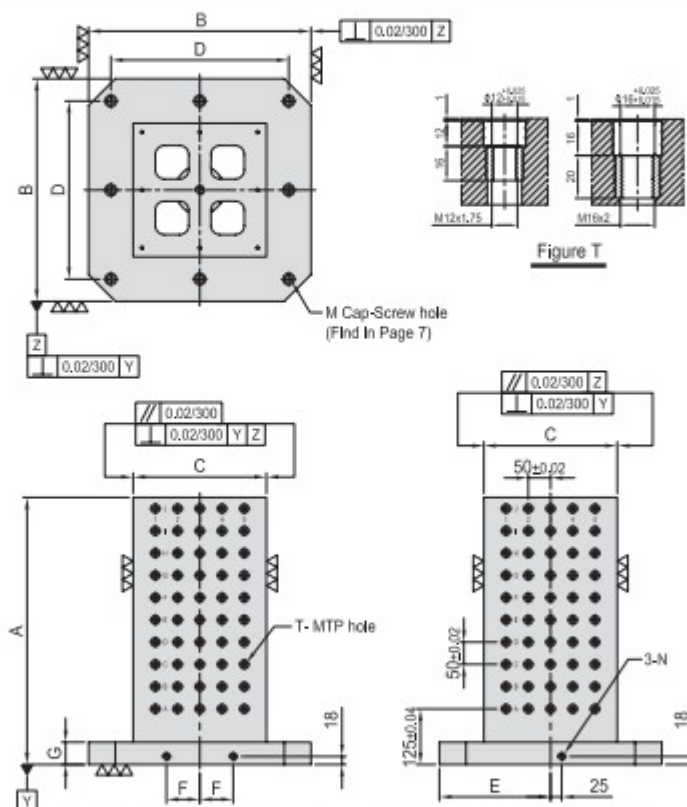

MODEL NO.	A	B	C	D	E	F	G	T	M	N	mm	Mounting holes	kg	MODEL NO.	A	B	C	D	E	F	G	T	M	N	mm	Mounting holes	kg		
BP08-300300-0500-12	500	300	150	250	150	40	50	φ12	M12	M12	M12	64	4	90	BP08-300300-0600-16	500	300	150	250	150	40	50	φ16	M16	M12	M12	64	4	90
BP08-400400-0500-12	500	400	250	320	200	55	50	φ12	M12	M16	M16	128	4	155	BP08-400400-0600-16	500	400	250	320	200	55	50	φ16	M16	M16	M16	128	4	152
BP08-400400-0650-12	650											176	4	200	BP08-400400-0650-16	650											176	4	195
BP08-500500-0600-12	600	500	300	400	250	75	50	φ12	M12	M16	M16	200	8	240	BP08-500500-0600-16	600	500	300	400	250	75	50	φ16	M16	M16	M16	200	8	235
BP08-500500-0750-12	750											260	8	300	BP08-500500-0750-16	750											260	8	295
BP08-630630-0700-12	700	630	350	500	315	100	50	φ12	M12	M16	M16	288	8	360	BP08-630630-0700-16	700	630	350	500	315	100	50	φ16	M16	M16	M16	288	8	365
BP08-630630-0850-12	850											360	8	445	BP08-630630-0850-16	850											360	8	440
BP08-800800-0800-12	800	800	500	640	400	135	50	φ12	M12	M16	M16	504	8	635	BP08-800800-0800-16	800	800	500	640	400	135	50	φ16	M16	M16	M16	504	8	630
BP08-800800-1000-12	1000											648	8	780	BP08-800800-1000-16	1000											648	8	770
BP08-10001000-1000-12	1000	1000	600	800	500	165	55	φ12	M12	M20	M16	792	8	1164	BP08-10001000-1000-16	1000	1000	600	800	500	165	55	φ16	M16	M20	M16	792	8	1164
BP08-10001000-1250-12	1250											1012	8	1391	BP08-10001000-1250-16	1250											1012	8	1391