




Supports long work pieces securely

- Clamp handle can be installed on left or right side
- Notch type hard wheel



Dimensions

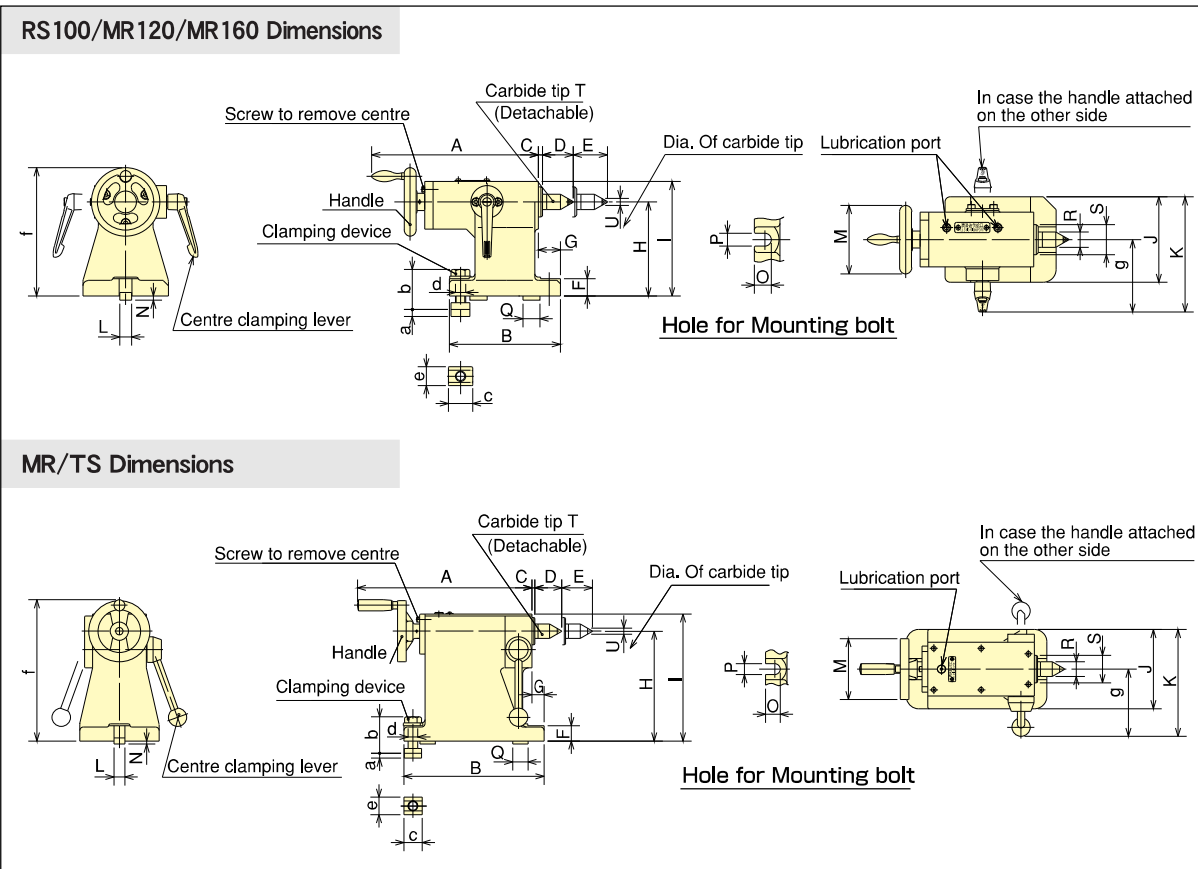

TS

Dimensions

Model	Dimensions		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	a	b	c	d	e	f	g	Mass of product(kg)
RS100RN	195	130	5	36.0	40	20	26	110	134.0	100	135.0	14h7	φ80	5	20.0	15	20	φ18.0	φ35	MT-2	φ8	8.6	47.0	28.5	M12	22.0	150	85.0	8		
MR120RN	185	130	5	36.0	30	20	26	120	144.0	100	135.5	14h7	φ80	5	20.0	15	20	φ18.0	φ35	MT-2	φ8	8.6	47.0	28.5	M12	22.0	160	85.5	9		
MR160RN	185	140	5	36.0	30	25	31	140	164.0	120	145.5	18h7	φ80	5	24.5	19	25	φ18.0	φ35	MT-2	φ8	11.0	58.0	30.0	M16	28.5	180	85.5	10		
TS160RN	286	220	5	44.0	50	20	15	120	149.5	110	160.0	18h7	φ100	5	22.0	19	25	φ24.1	φ45	MT-3	φ10	11.0	54.5	30.0	M16	28.5	170	103.0	12		
MR200RN TS200RN	286	230	5	44.0	50	25	20	140	169.5	120	163.0	18h7	φ100	5	24.5	19	25	φ24.1	φ45	MT-3	φ10	11.0	59.5	30.0	M16	28.5	190	103.0	16		
MR250RN TS250RN	286	230	5	44.0	50	25	20	180	209.5	130	176.0	18h7	φ100	5	24.5	19	25	φ24.1	φ45	MT-3	φ10	11.0	59.5	30.0	M16	28.5	230	111.0	20		
MR320RN TS320RN	286	230	5	44.0	50	25	20	225	254.5	150	186.0	18h7	φ100	5	24.5	19	25	φ24.1	φ45	MT-3	φ10	11.0	59.5	30.0	M16	28.5	275	111.0	24		
TS400RN	414	320	3	52.4	70	35	17	255	305.0	210	261.0	18h7	φ140	5	28.5	19	25	φ31.6	φ65	MT-4	φ14	11.0	69.5	30.0	M16	28.5	325	156.0	67		
TS500RN	414	320	3	52.4	70	35	17	310	360.0	210	261.0	18h7	φ140	5	28.5	19	25	φ31.6	φ65	MT-4	φ14	11.0	69.5	30.0	M16	28.5	380	156.0	80		
TS630RN	461	330	5	70.0	80	40	15	400	450.0	260	317.0	18h7	φ160	5	32.5	19	25	φ44.7	φ80	MT-5	φ18	11.0	77.5	30.0	M16	28.5	480	187.0	100		