


Griffe temprate per pezzi grezzi

Hard Top gripper jaws



APPOGGI (vedi pag. 8)

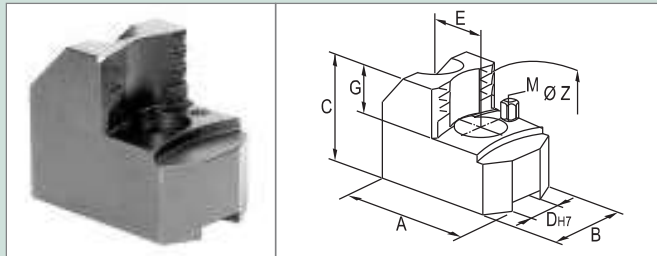

KITAGAWA - MATSUMOTO Ø 254-10"

ART.	CAMPO DI BLOCCAGGIO Ø Z	A	B	C	D _{H7}	E	Ø FORI	P	G	M	Peso Kg. SR. 3 PZ
3060	40-80	105	40	49	16	30	13-19	1,5 x 60°	25	M 8	2,40
3061	80-120	90	40	49							2,30
3062	120-160	80	45	58							2,65
3063	160-200	80	50	58					2,70		
3064	200-280	108	60	65					30	M 10	2,80

KITAGAWA - MATSUMOTO Ø 304-12"

ART.	CAMPO DI BLOCCAGGIO Ø Z	A	B	C	D _{H7}	E	Ø FORI	P	G	M	Peso Kg. SR. 3 PZ
3070	50-100	120	50	49	18	30	15-23	1,5 x 60°	25	M 8	5,30
3071	100-150	102	50	49							5,00
3072	150-200	90	60	65					30	M 10	3,70
3073	200-300	115	60	65							5,80
3074	50-100	117	50	49	21	30	17-25	1,5 x 60°	25	M 8	5,15
3075	100-150	102	50	49							5,00
3076	150-200	90	60	65					30	M 10	3,50
3077	200-300	115	60	65							5,50

KITAGAWA - MATSUMOTO Ø 381-15"

ART.	CAMPO DI BLOCCAGGIO Ø Z	A	B	C	D _{H7}	E	Ø FORI	P	G	M	Peso Kg. SR. 3 PZ
3045	100-150	148	60	68	22	43	21-31	1,5 x 60°	45	M 8	8,00
3046	150-200	125	60	68							6,50
3047	200-275	108	65	90							M 10
3048	275-350	123	70	90						15,00	
3049	350-425	158	80	95						22,00	
3050	425-525	240	90	95						24,50	