
## **Dovetail Vice**

## **Dovetail Vice B**



Part No.	HSK Type	No. of Grooves	В	W	G (depth)	L	L,	Kg
DBK-A63-90	HSK-A63	3	90	12~73	20 - M4(6)	85	35	3.8
DBK-A100-140	HSK-A100	5	140	12~73	30 - M4(6)	100	35	7.7

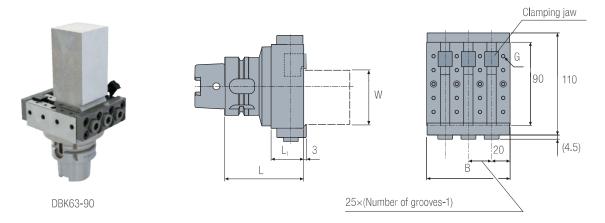

## Standard Accessories

• 8mm hex wrench

## Note

- Dovetail machining of the work-piece clamping area using an angular cutter is required prior to machining.
- · Work-piece clamping jaws move individually.
- Please use screw holes on the top face as necessary.

