



SU01

JIG REST BUTTON

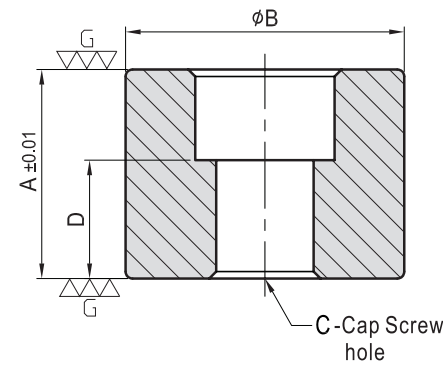

- Material / Finish :
Material : S45C(JIS) / CK45(DIN)
- Heat treated: HRC 40°.
- Surface finish : Black Oxide.
- Application : mount onto base plate or clamp cube for supporting workpiece.
- Features : Jig rest buttons are extremely useful as supports, side locator pads, and jig feet.

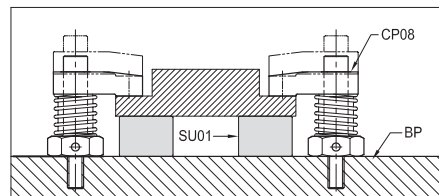



MODEL NO.	A	B	C	D	kg
SU01-1230	30	40	M12	17	0.24
SU01-1240	40			27	0.32
SU01-1250	50			37	0.41
SU01-1630	30	50	M16	12	0.36
SU01-1640	40			22	0.50
SU01-1650	50			32	0.64

SU02

OFFSET JIG REST BUTTON





- Material / Finish :
Material : S45C(JIS) / CK45(DIN)
- Heat treated : HRC 40°.
- Surface finish : Black Oxide.
- Application : Use for supporting and / or positioning workpiece.
- Features : Jig rest buttons are extremely useful as supports, side locator pads, and jig feet.

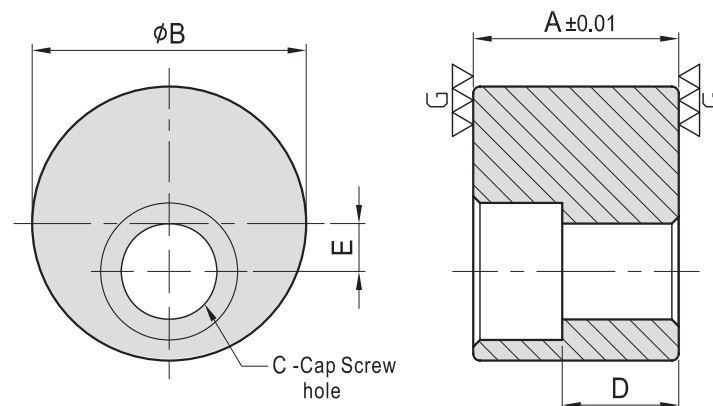

MODEL NO.	A	B	C	D	E	kg
SU02-1230	30	40	M12	17	7	0.24
SU02-1240	40			27		0.32
SU02-1250	50			37		0.41
SU02-1630	30	50	M16	12	10	0.36
SU02-1640	40			22		0.50
SU02-1650	50			32		0.64




- Material / Finish :
Material : S45C(JIS) / CK45(DIN)
- Heat treated : HRC 40°.
- Surface finish : Black Oxide.
- Application : Support and locate with one part.

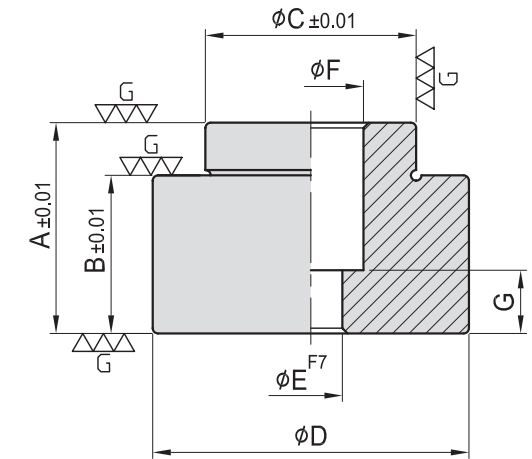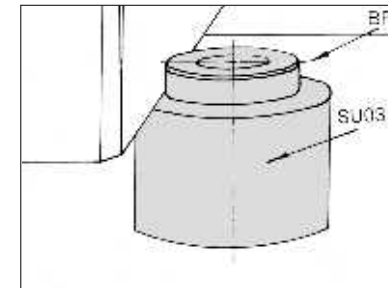



MODEL NO.	A	B	C	D	E	F	G	Kg
SU03-1230	30	40	40	60	12	20	12	0.68
SU03-1240	40	50						0.88
SU03-1250	50	60						1.10
SU03-1630	30	40	50	75	16	26	15	1.08
SU03-1640	40	50						1.40
SU03-1650	50	60						1.70

SU04

LOCATING CYLINDER



- Material / Finish :
Material : S45C(JIS) / CK45(DIN)
- Heat treated : HRC 40°.
- Surface finish : Black Oxide.
- Application : Support and locate with one part.

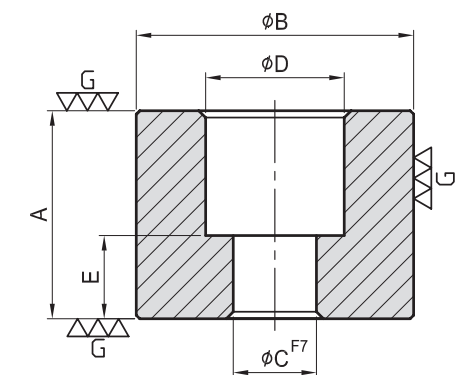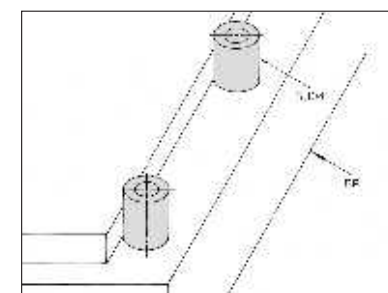

MODEL NO.	A	B	C	D	E	kg
SU04-1230	30	40	12	20	12	0.24
SU04-1240	40				12	0.32
SU04-1250	50				12	0.40
SU04-1630	30	50	16	26	12	0.37
SU04-1640	40				15	0.49
SU04-1650	50				15	0.60