


SU21

MAGNETIC SUPPORT JACK

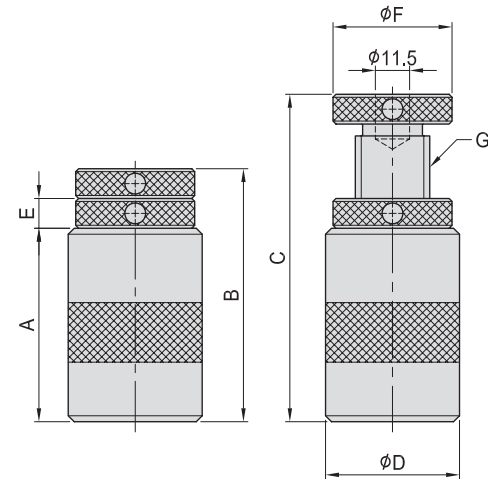


- Material / Finish :
Material : S45C(JIS), heat treated
- Surface finish : Black Oxide.

MODEL NO.	A	B~C	D	E	F	G	kg	KN
SU21-S050	24	40~50	45	8	35	Tr18x2	0.41	80
SU21-S065	34	50~65					0.54	
SU21-S085	49	65~85	45	8	35	Tr20x3	1.03	80
SU21-S110	63	85~110	45	12	40	Tr25x4	1.75	150
SU21-S165	85	110~165	50		45		2.93	
SU21-S265	135	165~265	60	15	50	Tr32x5	6.23	200
SU21-S300	170	265~300					7.50	

SU23

LARGE SUPPORT JACK

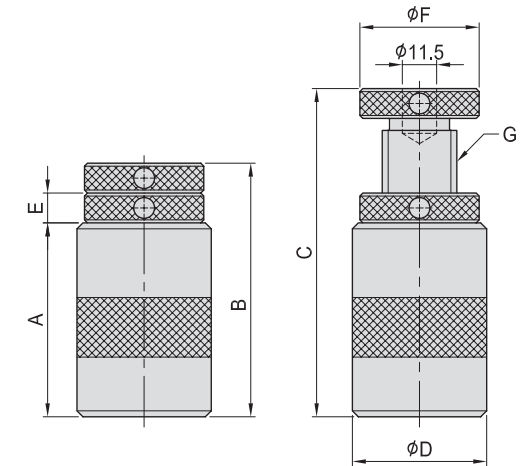


- Material / Finish :
Material : S45C(JIS), heat treated
- Surface finish : Black Oxide.

MODEL NO.	A	B~C	D	E	F	G	kg	KN
SU23-S0400	270	285~400	70	15	60	Tr40x4	8.0	260
SU23-S0500	370	385~500					10.5	
SU23-S0600	470	485~600	70	15	60	Tr40x4	12.0	260
SU23-S0700	570	585~700					14.0	
SU23-S0800	670	685~800	70	15	60	Tr40x4	15.0	260
SU23-S0900	770	785~900					16.5	
SU23-S1000	870	885~1000					18.0	

SU22

SUPPORT JACK

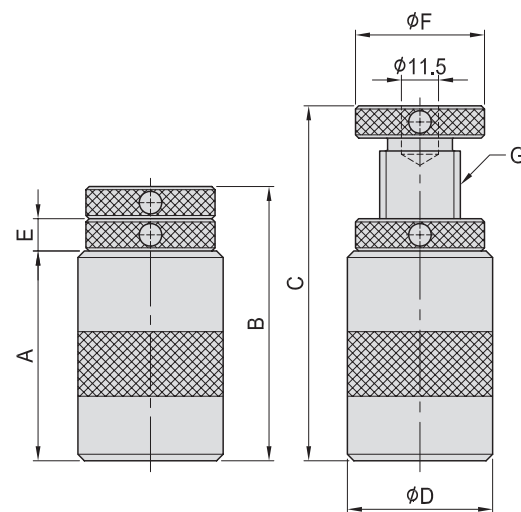

- Material / Finish :
Material : S45C(JIS), heat treated
- Surface finish : Black Oxide.



MODEL NO.	A	B~C	D	E	F	G	kg	KN
SU22-S050	21	37~50	40	8	35	Tr20x3	0.29	72
SU22-S070	34	50~70					0.40	
SU22-S100	50	70~100	45	10	40	Tr25x4	0.72	135
SU22-S150	76	100~150	50	12	45		1.30	
SU22-S250	120	150~250	60	15	50	Tr28x5	2.90	155
SU22-S300	170	200~300					3.50	

SU24

KNURLED ADJUSTING SCREW



- Material / Finish :
Material : S45C(JIS), heat treated
- Heat treated : HRC 33°.
- Surface finish : Black Oxide.

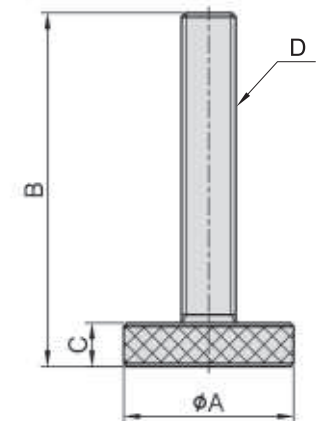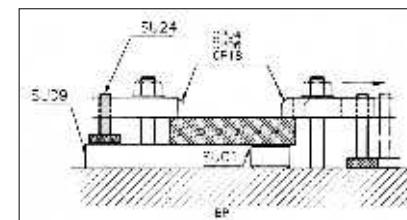

MODEL NO.	A	B	C	D	kg
SU24-12060	28	60	8	M12	0.08
SU24-14065	30	65	9	M14	0.10
SU24-16070	30	70	10	M16	0.13
SU24-18080	36	80	12	M18	0.21
SU24-20130	50	130	16	M20	0.47