
Electrofine

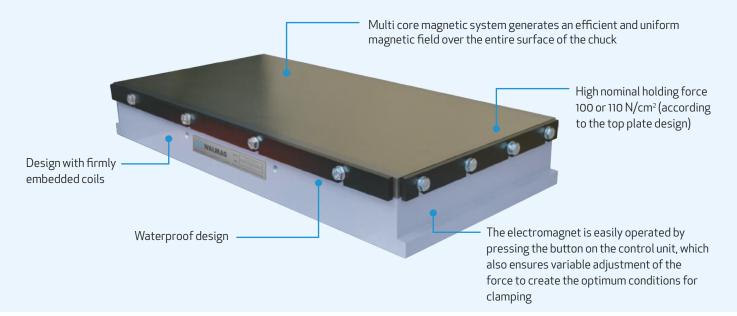

When to choose the Electrofine electromagnetic chuck:

Electrofine is used for efficient clamping of very small workpieces during precise surface grinding. Recommended minimum dimensions are $25 \times 25 \times 3$ mm. For smaller workpieces from $15 \times 15 \times 1$ mm, the special Microfine version is available.

APPLICATION TECHNOLOGY CHUCK DIMENSION HOLDING FORCE POLES

Model (Electrofine)	W (mm)	L (mm)	H (mm)	Wattage (W)	Weight (kg)
ELEC150300T31	150	300	74	77,5	25
ELEC200400T31	200	400	74	112	41
ELEC200500T31	200	500	74	166	55
ELEC200600T31	200	600	74	137	65
ELEC300600T31	300	600	74	253	94

Model (Microfine)	W (mm)	L (mm)	H (mm)	Wattage (W)	Weight (kg)
ELEC150250T1405	150	250	72	71	19
ELEC150300T1405	150	300	72	78	22
ELEC200400T1405	200	400	72	113	39
ELEC200500T1405	200	500	72	166	52
ELEC200600T1405	200	600	72	137	61
ELEC300600T1405	300	600	72	252	97


Important parameters:

Regrinding limit: 6 mmMin. workpiece size: $25 \times 25 \times 3 \text{ mm}$ (Electrofine), $15 \times 15 \times 1 \text{ mm}$ (Microfine)

Pole pitch: $74 \times 3+1 \text{ mm}$ (Electrofine), $74 \times 3+1 \text{ mm}$ (Microfine)

Use:

 for clamping small and large workpieces during precise surface grinding

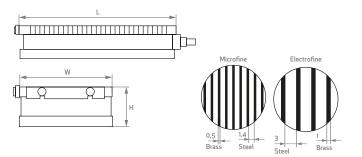

For more information, visit www.walmagmagnetics.com