

M/C BASE PLATE



- Material / Finish:
Material: Cast Iron FC300(JIS) / GG30(DIN)
Heat treated (Normalized)
Alignment Bushing: SUJ2(JIS) / 100Cr6(DIN) heat treated.
Threaded Insert: S45C (JIS)/ CK45 (DIN), heat treated.
MTP hole spacing: 50 ± 0.02
- Application: Vertical Machining Center.
- Features: Alignment bushing & thread insert at every hole location, easily adapts to standardized jig components.


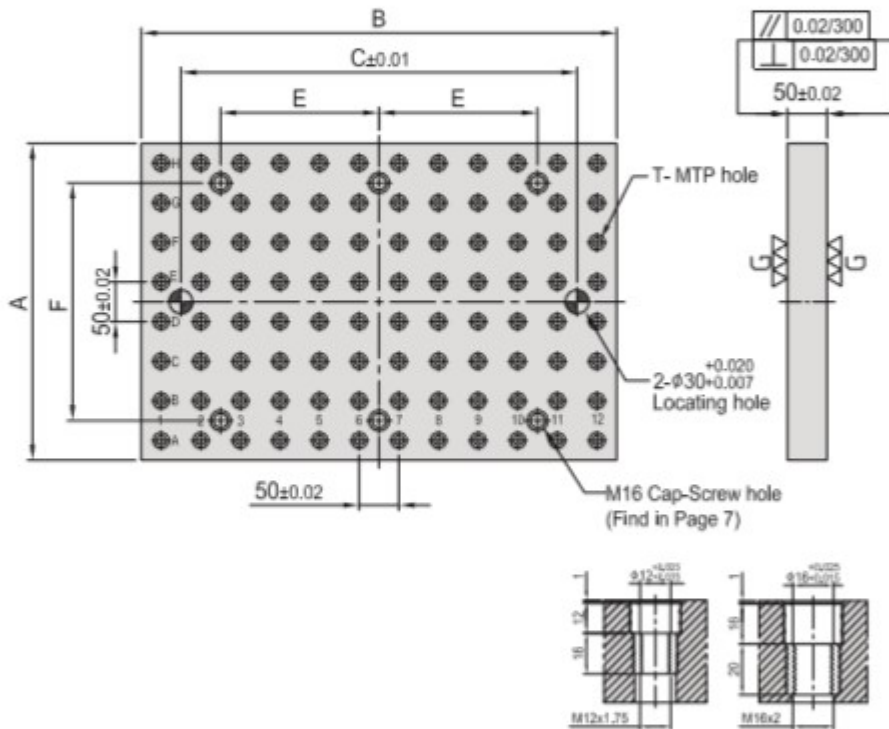


Figure T

MODEL NO.	A	B	C	E	F	T	MTP	kg
BP02-50400-0600-12	400					φ 12	M12	96 90
BP02-50500-0600-12	500	600	-	-		φ 12	M12	120 112
BP02-50600-0600-12	600					φ 12	M12	144 134
BP02-50400-0800-12	400	800	-	-		φ 12	M12	128 109
BP02-50450-0900-12	450	900	-	-		φ 12	M12	158 138
BP02-50500-1000-12	500	1000	-	-		φ 12	M12	200 165
BP02-50600-1200-12	600	1200	-	-		φ 12	M12	288 244

MODEL NO.	A	B	C	E	F	T	MTP	kg
BP02-50400-0600-16	400					φ 16	M16	96 89
BP02-50500-0600-16	500	600	-	-		φ 16	M16	120 108
BP02-50600-0600-16	600					φ 16	M16	144 120
BP02-50400-0800-16	400	800	-	-		φ 16	M16	128 108
BP02-50450-0900-16	450	900	-	-		φ 16	M16	158 134
BP02-50500-1000-16	500	1000	-	-		φ 16	M16	200 164
BP02-50600-1200-16	600	1200	-	-		φ 16	M16	288 240

*Special Design Welcome !