


# PT46

## FEET(SERRATED END)

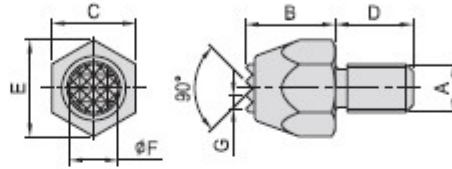

### Tooth plate

- Material : SKH9(JIS) / S18-1-2-5(DIN)
- Heat treated : HRC 60\*

### Tooth plate

- Material : Extremely hard.

- Material : S45C(JIS)/34CrMo4(DIN)
- Heat treated : HRC 28 ~ 32 \*
- Serrated surface to be heat treated with high frequency quenching.
- Surface finish : Black Oxide.
- Application : Multipurpose work support and clamping unit, ideal for rough parts.
- Features : Excellent holding power from the serrated face.

| MOBL. NO. | A   | B  | C  | D  | E    | F    | G   | kg    | MOBL. NO.  | A   | B  | C  | D  | E    | F    | G   | kg    |
|-----------|-----|----|----|----|------|------|-----|-------|------------|-----|----|----|----|------|------|-----|-------|
| PT46-0610 | M6  | 10 | 10 | 11 | 11.5 | 6.5  | 2.3 | 0.008 | PT46-0610K | M6  | 10 | 10 | 11 | 11.5 | 6.5  | 2.3 | 0.008 |
| PT46-0620 | M6  | 20 | 10 | 11 | 11.5 | 6.5  | 2.3 | 0.013 | PT46-0620K | M6  | 20 | 10 | 11 | 11.5 | 6.5  | 2.3 | 0.013 |
| PT46-0815 | M8  | 15 | 14 | 13 | 16.1 | 6.1  | 2.3 | 0.016 | PT46-0815K | M8  | 15 | 14 | 13 | 16.1 | 6.1  | 2.3 | 0.016 |
| PT46-0830 | M8  | 30 | 14 | 13 | 16.1 | 6.1  | 2.3 | 0.033 | PT46-0830K | M8  | 30 | 14 | 13 | 16.1 | 6.1  | 2.3 | 0.033 |
| PT46-1020 | M10 | 20 | 17 | 16 | 19.5 | 11.4 | 3.0 | 0.044 | PT46-1020K | M10 | 20 | 17 | 16 | 19.5 | 11.4 | 3.0 | 0.044 |
| PT46-1040 | M10 | 40 | 17 | 16 | 19.5 | 11.4 | 3.0 | 0.080 | PT46-1040K | M10 | 40 | 17 | 16 | 19.5 | 11.4 | 3.0 | 0.080 |
| PT46-1225 | M12 | 25 | 19 | 20 | 21.9 | 13.0 | 3.0 | 0.070 | PT46-1225K | M12 | 25 | 19 | 20 | 21.9 | 13.0 | 3.0 | 0.070 |
| PT46-1250 | M12 | 50 | 19 | 20 | 21.9 | 13.0 | 3.0 | 0.126 | PT46-1250K | M12 | 50 | 19 | 20 | 21.9 | 13.0 | 3.0 | 0.126 |
| PT46-1630 | M16 | 30 | 24 | 25 | 27.2 | 16.2 | 3.0 | 0.130 | PT46-1630K | M16 | 30 | 24 | 25 | 27.2 | 16.2 | 3.0 | 0.130 |
| PT46-1660 | M16 | 60 | 24 | 25 | 27.2 | 16.2 | 3.0 | 0.230 | PT46-1660K | M16 | 60 | 24 | 25 | 27.2 | 16.2 | 3.0 | 0.230 |
| PT46-2030 | M20 | 30 | 30 | 25 | 34.6 | 25.2 | 3.0 | 0.200 | PT46-2030K | M20 | 30 | 30 | 25 | 34.6 | 25.2 | 3.0 | 0.200 |
| PT46-2060 | M20 | 60 | 30 | 25 | 34.6 | 25.2 | 3.0 | 0.360 | PT46-2060K | M20 | 60 | 30 | 25 | 34.6 | 25.2 | 3.0 | 0.360 |

AUX PARTS