



CHUCK

Quick Jaw Replacement Chuck

QJR series

Suitable for small and large batch production
Quick & smooth Jaw Replacement

Quick Jaw Replacement

Jaw can be replaced quickly and easily by handle supplied.

Suitable for small and large batch production

Reduced set up time by Quick and Easy Jaw Replacement.

Interchangeable mounting dimensions


Kitagawa's B-200 and BB200 series can be easily replaced with QJR large thru-hole power chucks.

Base jaws and Soft jaws are available as option.




Standard Chuck

Dimensional Drawings

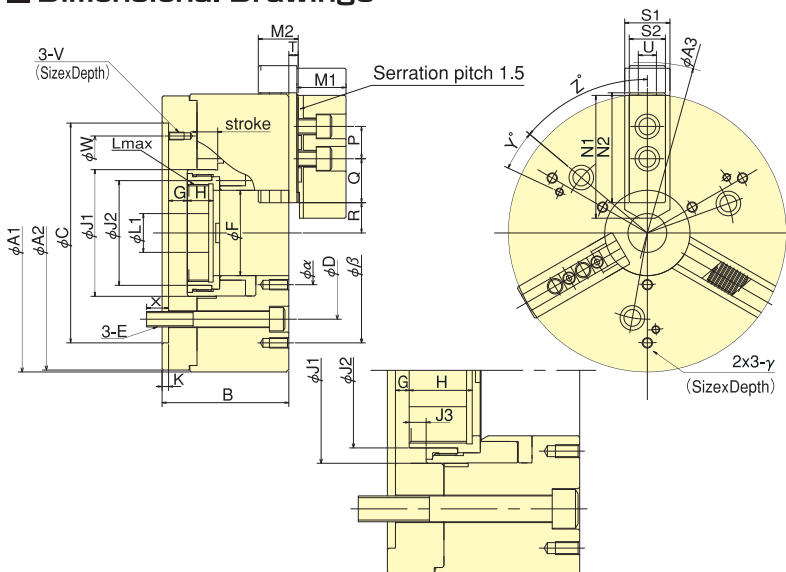

Gripping Characteristic Graphs

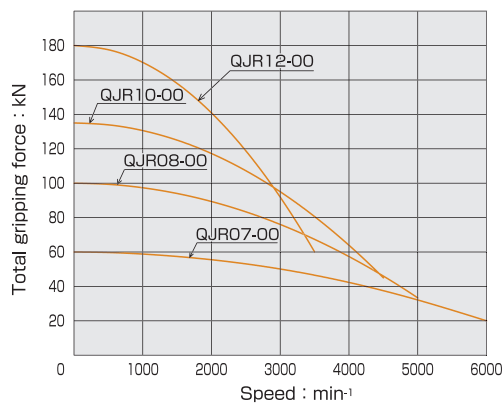

*Graphs show the relationship between the rotation speed and the gripping force at the position of aligning base jaws with chuck OD when using standard soft jaws.

*Centrifugal force is different vastly depending on the size, shape or orientation of top jaws, or the position to insert base jaws.

Dimensions

Model	A1	A2	A3	B	C (H6)	D	E	F	G max.	G min.	H	J1	J2	J3	K	L max.	L1	M1	M2
QJR07-00	178	178	212	92	140	104.8	M10	53	11	-4	24	81	66	9.5	5	M60x2	20	32	25.5
QJR08-00	215	212	264	98	170	133.4	M12	66	14.5	-1.5	20	98	81	-	5	M75x2	30	38	30.8
QJR10-00	254	251	312	119	220	171.4	M16	81	8.5	-10.5	39	115	96	10.5	5	M90x2	45	42	39
QJR12-00	315	312	360	133	220(300)	171.4(235)	M16(M20)	106	8	-15	42	140	121	15	6	M115x2	50	50	45.2

Model	N1	N2	P	Q	R max.	R min.	S1	S2	T	U	V	W	X	Y	Z	α	β	γ
QJR07-00	72	73	20	28.5	14 -32	10.3-28.3	31	25.5	5.45	12	M6x12	116	17	-30	50	75	155	M8x13
QJR08-00	95	85	25	34	20.4-44.4	16.7-40.7	35	28	7.25	14	M6x12	150	17	15	50	80	170	M8x15
QJR10-00	110	100.5	30	40.5	21.2-52.7	16.8-48.3	40	35	11.3	16	M8x15	190	23	-15	50	100	220	M8x15
QJR12-00	111	108	30	57	33.9-69.9	28.6-64.6	50	50	12	21	M8x15(M10x16)	190(260)	22(27)	-15	45(50)	130	280	M10x17

Specifications

The numbers in () are the dimension of QJR12-00 for interchangeable BB212. Please contact us for more details.

Model	Thru-Hole mm	Gripping range mm		Jaw Stroke (diameter) mm	Plunger Stroke mm	Max. Draw Bar Pull Force kN	Max. Gripping Force kN	Max. Speed min ⁻¹	Net Weight with Soft top jaws kg	Moment of inertia kg·m ²	Option	
		Max.	Min.								Matching Base jaw	Matching Soft top jaw
QJR07-00	53	178	19	7.4	15	25	60	6000	14	0.06	QJR07-BJ00	SBO6B1
QJR08-00	66	210	23	7.4	16	45	100	5000	25	0.18	QJR08-BJ00	SBO8B1
QJR10-00	81	254	41	8.8	19	60	135	4500	45	0.41	QJR10-BJ00	SB10B1
QJR12-00	106	315	47	10.6	23	81	180	3500	75	1.15	QJR12-BJ00	SB12N1

The models above are not included Base jaws or Soft jaws. Please refer above list when ordering Base jaws and soft jaws.